


UNJ6226ZX



CE

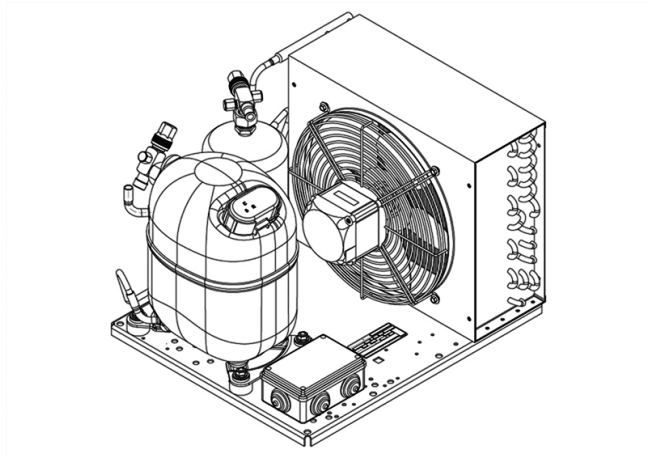

ENGINEERING CODE
546EM5603AA

REFRIGERANT
R-134a

POWER SUPPLY
380-420 V 50 Hz

APPLICATION
HBP

MOTOR TYPE
3PH

STANDARD
EN13215_RG20

COOLING CAPACITY
1566 W

EFFICIENCY
1.77 W/W

DATA

GENERAL DATA

Model	UNJ6226ZX
-------	-----------

ELECTRICAL DATA

Locked Rotor Amperage (LRA)	13.70 A
-----------------------------	---------

Rated Load Amperage (RLA)	2.75 A
---------------------------	--------

Maximum Overcurrent Protection (MOP)	6.19 A
--------------------------------------	--------

Minimum Current Ampacity (MCA)	3.4 A
--------------------------------	-------

ACCESSORIES

Discharge valve	SOLDER 3/8"	2110049
-----------------	-------------	---------

Suction valve	SOLDER 5/8"	2110054
---------------	-------------	---------

CONDENSING COMPONENTS

Compressor	NJ6226ZX	M/HBP
------------	----------	-------

Condenser	3R12T	2451140
-----------	-------	---------

Refrigerant	R-134a
-------------	--------

Expansion Device	C-V
------------------	-----

Fan Blade Diameter	275 mm
--------------------	--------

Fankit	34W/400V 275/31	1996582
--------	-----------------	---------

MECHANICAL DATA

Air Flow	640 m ³ /h
Height	324 mm
Receiver	2.3 L
Shaft Power	34 W
Weight	37 Kg
Width	410 mm
Length	481 mm

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-134a
Tested Application	HBP
Tested Standard	EN13215_RG20

RATED POINTS

Ambient Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Consumo de Potencia W
32	-10	1566	1.77	884

Test Condition: Subcooling 3 K, Return Gas 20 °C.

PERFORMANCE CURVE

Ambient Temperature 25°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Consumo de Potencia W
-15	1379	1.82	759
-5	2006	2.05	977
0	2328	2.11	1106
5	2809	2.30	1222
10	3560	2.72	1310

Test Condition: Subcooling 3 K, Return Gas 20 °C.

PERFORMANCE CURVE

Ambient Temperature 32°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Consumo de Potencia W
-15	1271	1.63	780
-5	1799	1.78	1011
0	2083	1.82	1142
5	2531	2.01	1261
10	3257	2.41	1349

Test Condition: Subcooling 3 K, Return Gas 20 °C.

PERFORMANCE CURVE

Ambient Temperature 43°C


Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Consumo de Potencia W
-15	1068	1.29	827
-5	1540	1.44	1071
0	1811	1.50	1205
5	2257	1.71	1323

Test Condition: Subcooling 3 K, Return Gas 20 °C.

ENVELOPE



EXTERNAL DIMENSIONS

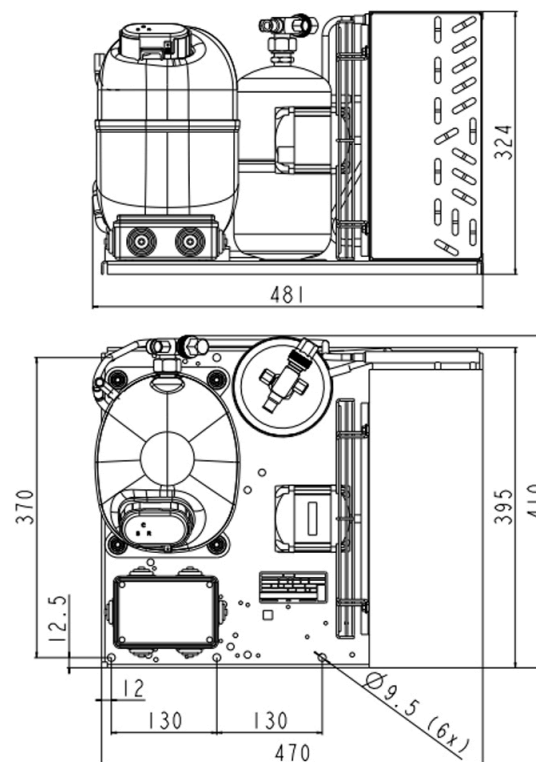

WIRING DIAGRAM

