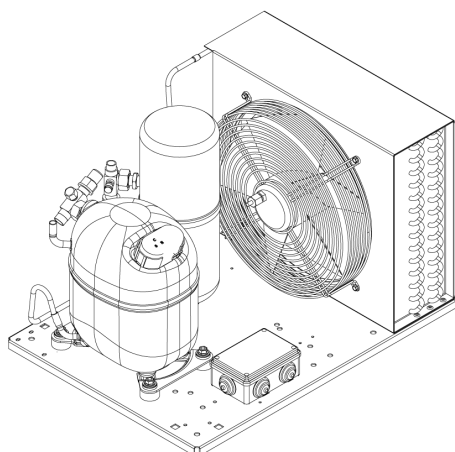
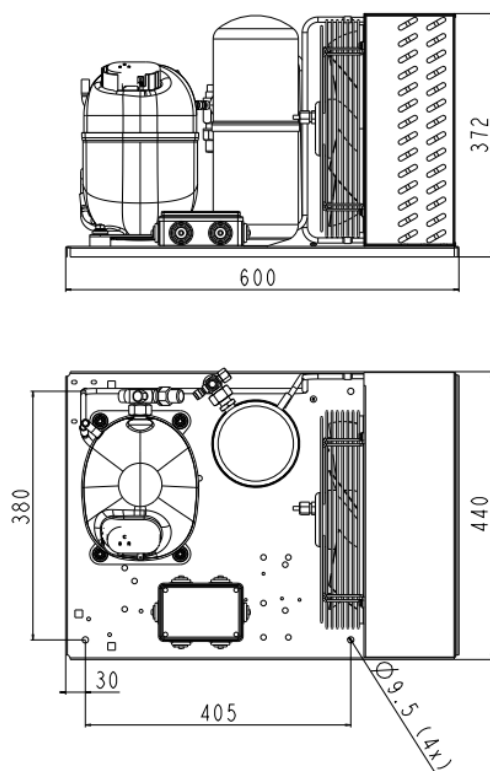
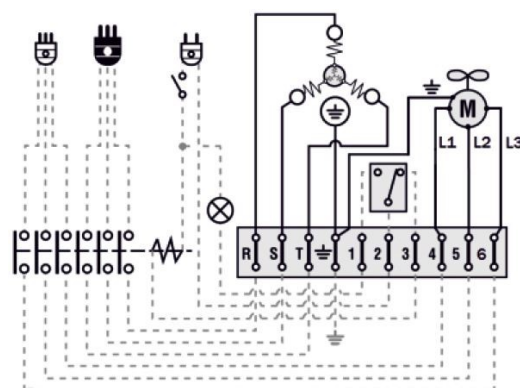
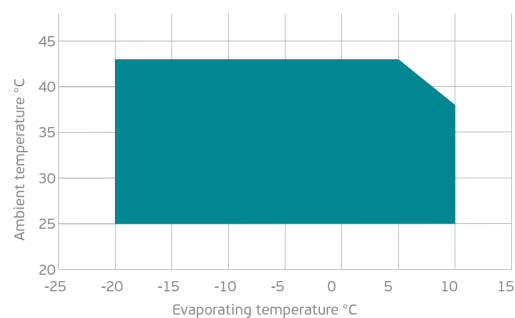


**GENERAL DATA**

Application:	M/HBP
Refrigerant:	R404A
Expansion Device:	C-V
Weight:	42 kg
Receiver:	0 liter
Voltage/Frequency:	380 - 420 V 50 ~
Height:	42 mm
Length:	600 mm
Width:	440 mm
Institute Approvals:	CE

EXTERNAL DIMENSIONS**WIRING DIAGRAM****OPERATING ENVELOPE****COMPONENTS (SPARE PARTS)**

compressor:	NJ9238GS	947RM19..AC
fankit:	S4E300-XX	1996590
valve_disch:	SOLDER 1/2"	2110050

For additional accessories please contact our technical support

compressor:	NJ9238GS	947RM19..AC
fankit:	S4E300-XX	1996590
valve_disch:	SOLDER 1/2"	2110050

ELECTRICAL DATA

Motor Type:	3PH -
Locked Rotor Amperage (RLA):	22 A
Max.Current:	4.49 A

At maximum evaporating temperature and maximum ambient temperature.

FAN MOTOR

Number:	1 -
Shaft Power:	60 W
Air Flow:	1300 m ³ /hod
Blade Diameter:	- mm

PERFORMANCE CURVE DATA

Standard: EN13215-RG20 / return gas 20°C, subcooling 3K

50 Hz

		Evaporating Temperature (°C)	Cooling Capacity (W)	Power Consumption (W)	Current Consumption (A)	Efficiency (W/W)
25°C Ambient Temperature		10°C	4 480	2 371	4.34	1.89
		5°C	4 048	2 144	4.04	1.89
		0°C	3 620	1 931	3.76	1.87
		-5°C	3 199	1 733	3.51	1.85
	Rated point	-10°C	2 785	1 549	3.28	1.80
		-15°C	2 380	1 379	3.08	1.73
		-20°C	1 985	1 222	2.90	1.62
32°C Ambient Temperature		10°C	4 082	2 444	4.48	1.67
		5°C	3 678	2 210	4.16	1.66
		0°C	3 283	1 991	3.87	1.65
		-5°C	2 897	1 787	3.61	1.62
	Rated point	-10°C	2 523	1 597	3.38	1.58
		-15°C	2 162	1 421	3.17	1.52
		-20°C	1 814	1 260	3.00	1.44
43°C Ambient Temperature		5°C	3 121	2 356	4.39	1.32
		0°C	2 755	2 114	4.04	1.30
		-5°C	2 404	1 886	3.73	1.28
	Rated point	-10°C	2 071	1 673	3.44	1.24
		-15°C	1 755	1 474	3.20	1.19
		-20°C	1 460	1 291	2.98	1.13

