


NEK2121GK

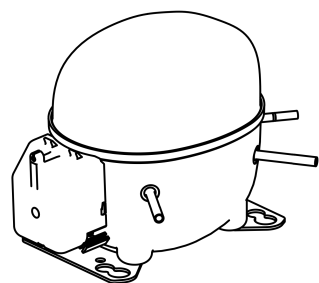

ENGINEERING CODE
957DA54

REFRIGERANT
R-404A

POWER SUPPLY
220-240 V 50 Hz

APPLICATION
LBP

MOTOR TYPE
CSIR

STANDARD
EN12900

COOLING CAPACITY
150 W

EFFICIENCY
0.97 W/W



DATA

GENERAL DATA

Model	NEK2121GK
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	LBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Static/220
HP	1/3
Starting Torque	HST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	27.4 Ω at 25°C
Run Winding Resistance	7.9 Ω at 25°C

MECHANICAL DATA

Displacement	5.44 cm ³
Oil Charge	350 ml
Oil Type	ESTER
Oil Viscosity	ISO22
Weight	10.4 Kg

ELECTRICAL COMPONENTS

Start Capacitor	43-53 µf/330 V
CSR CSIR BOX	No
Starting Device Type	RELAY
Starting Device Description	MTRP-38*
Overload Protection	T0050/G6

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-404A
Tested Application	LBP
Tested Standard	EN12900
Tested Cooling	Static
Tested Voltage	220 V
Refrigerant Temperature	Dew

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
40	-35	150	0.97	155	-	4.08

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

PERFORMANCE CURVE

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-40	125	0.94	133	-	3.18
-35	167	1.10	152	-	4.27
-30	220	1.28	172	-	5.63
-25	283	1.47	192	-	7.29
-20	358	1.69	211	-	9.27
-15	443	1.94	228	-	11.58
-10	540	2.23	242	-	14.24

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

PERFORMANCE CURVE

Condensing Temperature 45°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-40	100	0.74	135	-	2.88
-35	134	0.86	156	-	3.88
-30	178	0.99	179	-	5.16
-25	231	1.13	204	-	6.75
-20	293	1.29	228	-	8.65
-15	366	1.45	252	-	10.89
-10	449	1.64	274	-	13.49

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

PERFORMANCE CURVE

Condensing Temperature 55°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-30	136	0.75	181	-	4.64
-25	178	0.85	208	-	6.12
-20	229	0.96	238	-	7.93
-15	288	1.08	267	-	10.08
-10	356	1.20	296	-	12.59

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

ENVELOPE




External

EXTERNAL CHARACTERISTICS

Base Plate		SMALL	
Tray Holder		YES	
Connector	Internal Diameter	Shape	Material
Suction	8.1 mm	SLANTED 42°	COPPER
Discharge	6.1 mm	STRAIGHT	COPPER

EXTERNAL DIMENSIONS

SHELL

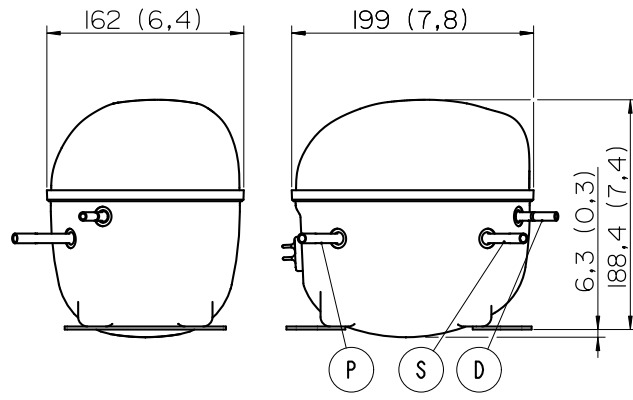

BASE



FENCE

