

Model

Designation	SC10GH	220-240V/50Hz 1~ 208-230V/60Hz 1~	Sales code:	104G8041
-------------	---------------	-----------------------------------	-------------	-----------------

Compressor design

Oil type	Polyolester	Refrigerant(s)	R134a, R513A
Oil viscosity	22cST	Displacement	10,29cm³ / 0,63cu.in
Oil quantity	504cm³ / 17fl.oz	Compressors on pallet	80
Refr. charge - tech. limit	1300g / 45,9oz		
Free gas volume comp.	1510cm³ / 51,1fl.oz		
Weight	12,8kg / 28,2lbs		
Motor protection	1# internal		
Winding resistance main	5,13Ω (at 25°C)		
Winding resistance aux	13,51Ω (at 25°C)		
Max. winding temp.	125°C / 257°F		
Max. discharge temp.	130°C / 266°F		



General - Configurations with SC10GH

	Conf. 1	Conf. 2	Conf. 3	Conf. 4
Motorconfiguration	CSIR	CSIR	CSIR	CSIR
Power supply (nominal)	220-240V/50Hz	220-240V/50Hz	208-230V/60Hz	208-230V/60Hz
Number of phases	1	1	1	1
Voltage range	198-254V	198-254V	198-254V	198-254V
Approvals	VDE, UL, CCC, KC	VDE, UL, CCC	VDE, UL, CCC, KC	VDE, UL, CCC
Starting torque	HST	HST	HST	HST
Note	- / -			

Applications with SC10GH

	Conf. 1	Conf. 2	Conf. 3	Conf. 4
Refrigerant	R134a	R513A	R134a	R513A
Application	HBP	HBP	HBP	HBP
System cooling	fan 3m/s	fan 3m/s	fan 3m/s	fan 3m/s
Hot gas defrost	OK	OK	OK	OK
Long interval pull down	OK	OK	OK	OK

Electrical data - Configurations with SC10GH

	Conf. 1	Conf. 2	Conf. 3	Conf. 4
Starting device type	relay	relay	relay	relay
Run capacitor	-/-	-/-	-/-	-/-
Start capacitor	80μF	80μF	80μF	80μF
LRA (locked rotor amps / 4s)	16,2A	16,2A	15,6A	15,6A
RLA (rated load amps / 1s)	3,1A	3,1A	2,8A	2,8A
Cut in current	16,2A	16,2A	15,6A	15,6A

Model

Designation

SC10GH

220-240V/50Hz 1~ 208-230V/60Hz 1~


Sales code:

104G8041


Compressor dimensions

Housing	A Height	209mm / 8,23in
	B Height	203mm / 7,99in
	C Length shell	218mm / 8,58in
	D Length w. cover	255mm / 10,04in
	E Width	151mm / 5,94in


Connectors	Suction X	Discharge Y	Process Z
Diameter [mm]	øi 10,11-10,29	øi 8,11-8,29	øi 6,11-6,29
(i:inside, o:outside) [in]	øi 0,4-0,41	øi 0,32-0,33	øi 0,24-0,25
Material	copper	copper	copper
Horizontal angle ±2°	37°	37°	143°
Vertical angle ±2°	30°	0°	150°
Position l/h/w [mm]	107/183/55	115/100/63	-107/183/55
[in]	4,2/7,2/2,2	4,5/3,9/2,5	-4,2/7,2/2,2
Straight tube l. [mm]	12	12	12
[in]	0,5	0,5	0,5

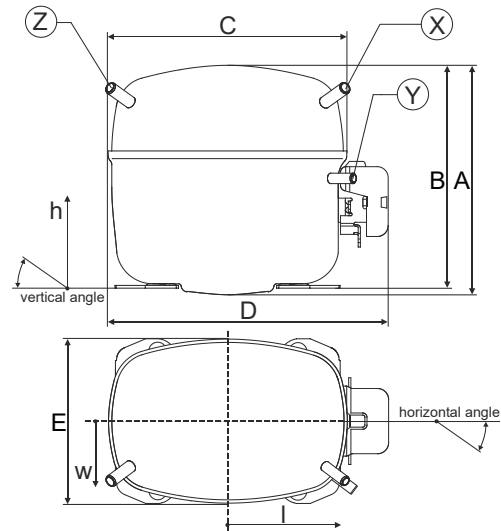


Compressor fixation

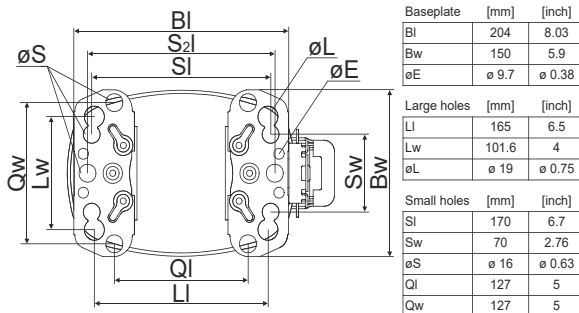

Bolt joint



Snap-on



Mounting accessories

	one comp.	multi pack
Bolt joint M6 ø16mm	118-1917	118-1918
Bolt joint ø1/4" ø16mm	118-1946	
Bolt joint ø1/4" ø19mm	118-1949	
Snap-on ø7,3 ø16mm	118-1947	118-1919



Model				
Designation	SC10GH	220-240V/50Hz	Conf. 1	Sales code: 104G8041

Configuration	Electrical accessories / wiring diagram			
Motorconfiguration	CSIR	CSIR		
Power supply (nominal)	220-240V/50Hz 1~			
Refrigerant	R134a			
Application	HBP			
Voltage range	198-254V			
Starting torque	HST			
Approvals	VDE			
	UL			
	CCC			
	KC			

Ambient temperatures / system cooling	
Ambient temperature min.:	10°C / 50°F
Ambient temperature max.:	43°C / 110°F

System cooling (n/a: outside limits)			
T ambient	LBP	MBP	HBP
32°C / 90°F	n/a	n/a	fan 3m/s
38°C / 100°F	n/a	n/a	fan 3m/s
43°C / 110°F	n/a	n/a	fan 3m/s

Operation pressure range

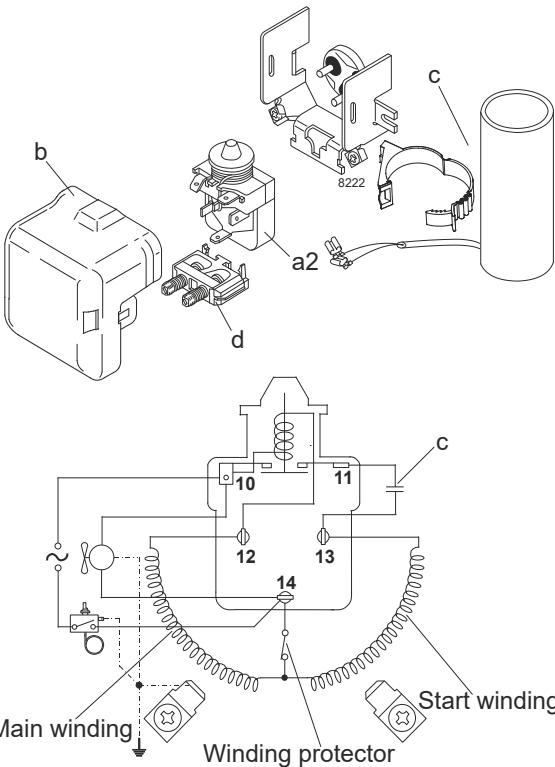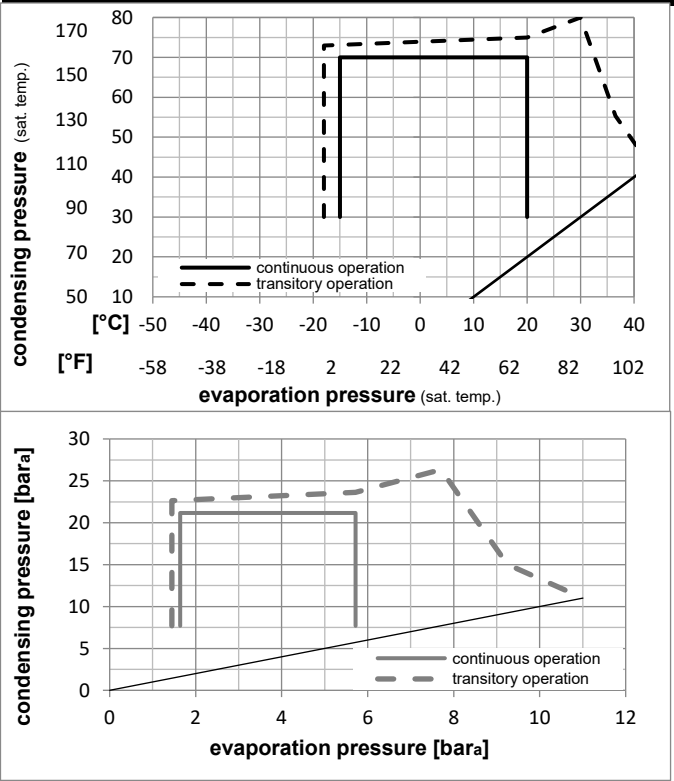

Components		
a2	relay	117U6005
c	start capacitor (80μF)	117U5017
d	cord relief	103N1004
b	plastic cover	103N2008

Model

Designation

SC10GH

220-240V/50Hz

Conf. 1

Sales code:

104G8041

Optimization + standard conditions

R134a, 220V/50Hz, CSIR, fan 3m/s, VDE, UL, CCC, KC

Evaporating pressure (saturation temperature)					Condensing pressure (saturation temperature)			Return gas temp.			Liquid temp.			Cooling capacity			COP			EER			Power consumption			Current consumption			Ref. mass flow	ASHRAE HBP
pe	pc	RGT	Tliq		[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]	[W]	[A]	[kg/h]																	
[°C]	7,2	54	35	46	925,4	3160	796,4	2,28	7,77	1,96	406,7	3,34	20,53																	
[°F]	45	130	95	115																										
[°C]	5	55	32	55	761,6	2601	655,5	1,93	6,59	1,66	395,0	3,26	18,77																	cecomaf HBP
[°F]	41	131	90	131																										
[°C]	5	50	20	50	794,7	2714	683,9	2,11	7,21	1,82	376,2	3,13	20,02																	EN12900 HBP
[°F]	41	122	68	122																										
[°C]	-7	54	35	46	481,8	1646	414,7	1,56	5,34	1,35	308,0	2,72	10,51																	ASHRAE MBP
[°F]	20	130	95	115																										
[°C]	-10	55	32	55	352,2	1203	303,1	1,25	4,28	1,08	280,7	2,57	8,52																	cecomaf MBP
[°F]	14	131	90	131																										
[°C]	-10	45	20	45	407,4	1391	350,6	1,51	5,15	1,30	269,9	2,51	9,54																	EN12900 MBP
[°F]	14	113	68	113																										

Performance tables

R134a, 220V/50Hz, CSIR, fan 3m/s, VDE, UL, CCC, KC

	pe		Cooling capacity			COP	EER		P1	I	m
	[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]	[W]	[A]	[kg/h]
[°C / °F]	-15	5	294,5	1006	253,5	1,26	4,32	1,09	232,9	2,34	6,42
cond. pressure	-10	14	422,7	1444	363,8	1,57	5,35	1,35	269,9	2,51	9,25
pc= 45/113	-5	23	564,2	1927	485,6	1,86	6,36	1,60	303,2	2,68	12,41
return gas temp.	0	32	722,6	2468	621,9	2,17	7,42	1,87	332,7	2,85	15,98
RGT= 32/90	5	41	901,5	3079	775,8	2,51	8,59	2,16	358,6	3,01	20,07
liquid temp	15	59	1334,5	4558	1148,5	3,34	11,42	2,88	399,0	3,33	30,23
Tliq= 45/113	20	68	1595,8	5450	1373,4	3,86	13,18	3,32	413,7	3,48	36,55
[°C / °F]	-15	5	233,0	796	200,5	0,99	3,38	0,85	235,2	2,34	5,61
cond. pressure	-10	14	352,2	1203	303,1	1,25	4,28	1,08	280,7	2,57	8,52
pc= 55/131	-5	23	477,7	1631	411,1	1,48	5,06	1,27	322,6	2,80	11,61
return gas temp	0	32	613,0	2093	527,5	1,70	5,80	1,46	360,6	3,03	14,99
RGT= 32/90	5	41	761,6	2601	655,5	1,93	6,59	1,66	395,0	3,26	18,77
liquid temp	15	59	1113,1	3801	957,9	2,46	8,40	2,12	452,6	3,70	27,96
Tliq= 55/131	20	68	1323,0	4518	1138,6	2,78	9,50	2,39	475,7	3,92	33,64



Model				
Designation	SC10GH	220-240V/50Hz	Conf. 2	Sales code: 104G8041

Configuration		Electrical accessories / wiring diagram		
Motorconfiguration	CSIR	CSIR		
Power supply (nominal)	220-240V/50Hz 1~			
Refrigerant	R513A			
Application	HBP			
Voltage range	198-254V			
Starting torque	HST			
Approvals	VDE			
	UL			
	CCC			

Ambient temperatures / system cooling	
Ambient temperature min.:	10°C / 50°F
Ambient temperature max.:	43°C / 110°F

System cooling (n/a: outside limits)			
T ambient	LBP	MBP	HBP
32°C / 90°F	n/a	n/a	fan 3m/s
38°C / 100°F	n/a	n/a	fan 3m/s
43°C / 110°F	n/a	n/a	fan 3m/s

Operation pressure range

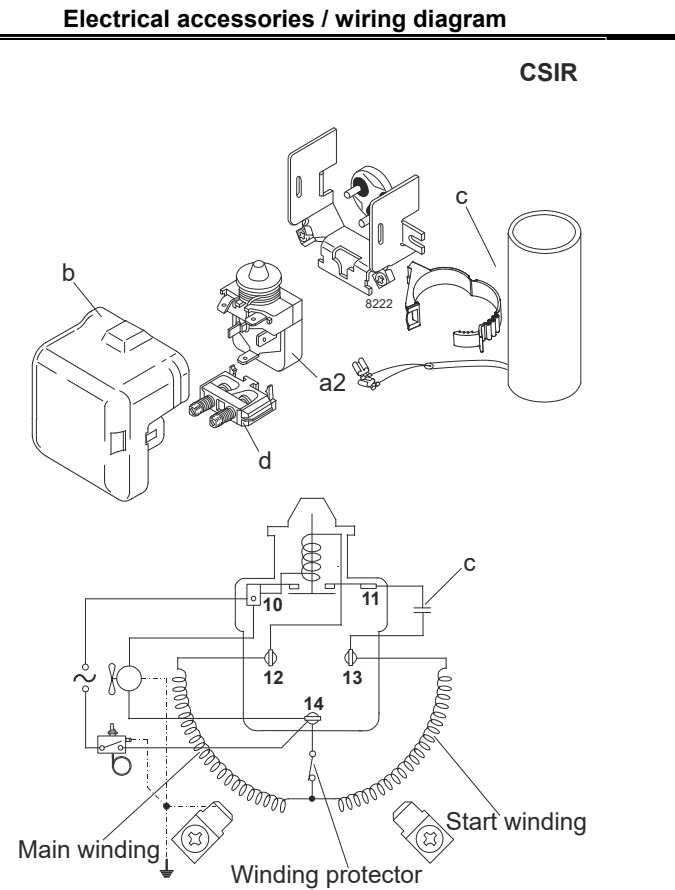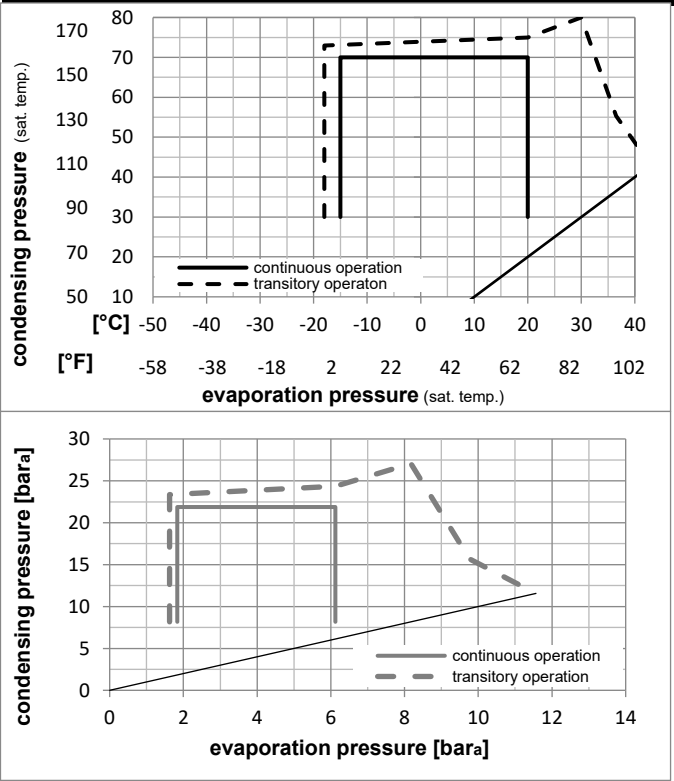

Components		
a2	relay	117U6005
c	start capacitor (80μF)	117U5017
d	cord relief	103N1004
b	plastic cover	103N2008

Model

Designation

SC10GH

220-240V/50Hz

Conf. 2

Sales code:

104G8041

Optimization + standard conditions

R513A, 220V/50Hz, CSIR, fan 3m/s, VDE, UL, CCC

		Evaporating pressure (saturation temperature)					Condensing pressure (saturation temperature)					Power consumption					
				Return gas temp.								Current consumption		Ref. mass flow			
				Liquid temp.		Cooling capacity		COP		EER		P1		I		m	
		pe	pc	RGT	Tliq	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]	[W]	[A]	[kg/h]			
[°C]		7,2	54	35	46												
[°F]		45	130	95	115	952,4	3252	819,6	2,24	7,66	1,93	424,4	3,49	23,66			ASHRAE HBP
[°C]		5	55	32	55												
[°F]		41	131	90	131	772,4	2638	664,7	1,87	6,38	1,61	413,2	3,42	21,71			cecomaf HBP
[°C]		5	50	20	50												
[°F]		41	122	68	122	807,0	2756	694,5	2,05	7,01	1,77	393,3	3,29	23,14			EN12900 HBP
[°C]		-7	54	35	46												
[°F]		20	130	95	115	506,5	1730	435,9	1,55	5,30	1,34	326,4	2,87	12,41			ASHRAE MBP
[°C]		-10	55	32	55												
[°F]		14	131	90	131	366,1	1250	315,1	1,23	4,18	1,05	298,8	2,70	10,12			cecomaf MBP
[°C]		-10	45	20	45												
[°F]		14	113	68	113	426,4	1456	367,0	1,49	5,08	1,28	286,5	2,62	11,30			EN12900 MBP

Performance tables

R513A, 220V/50Hz, CSIR, fan 3m/s, VDE, UL, CCC

	pe		Cooling capacity			COP	EER		P1	I	m
	[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]	[W]	[A]	[kg/h]
[°C / °F]	-15	5	314,1	1073	270,3	1,26	4,32	1,09	248,4	2,38	7,70
cond. pressure	-10	14	445,9	1523	383,7	1,56	5,31	1,34	286,5	2,62	10,96
pc= 45/113	-5	23	590,0	2015	507,7	1,84	6,29	1,59	320,2	2,83	14,56
return gas temp.	0	32	749,9	2561	645,4	2,15	7,33	1,85	349,6	3,02	18,60
RGT= 32/90	5	41	929,2	3173	799,7	2,48	8,47	2,13	374,8	3,18	23,18
liquid temp	15	59	1360,1	4645	1170,5	3,29	11,23	2,83	413,6	3,42	34,41
Tliq= 45/113	20	68	1618,7	5528	1393,1	3,79	12,94	3,26	427,4	3,51	41,33
[°C / °F]	-15	5	245,2	838	211,0	0,97	3,33	0,84	251,8	2,40	6,76
cond. pressure	-10	14	366,1	1250	315,1	1,23	4,18	1,05	298,8	2,70	10,12
pc= 55/131	-5	23	491,9	1680	423,3	1,44	4,92	1,24	341,2	2,96	13,66
return gas temp	0	32	626,1	2138	538,8	1,65	5,64	1,42	379,3	3,20	17,49
RGT= 32/90	5	41	772,4	2638	664,7	1,87	6,38	1,61	413,2	3,42	21,71
liquid temp	15	59	1115,1	3808	959,7	2,38	8,12	2,05	469,0	3,77	31,85
Tliq= 55/131	20	68	1318,6	4503	1134,8	2,68	9,17	2,31	491,2	3,91	38,05



Model				
Designation	SC10GH	208-230V/60Hz	Conf. 3	Sales code: 104G8041

Configuration		Electrical accessories / wiring diagram	
Motorconfiguration	CSIR	CSIR	
Power supply (nominal)	208-230V/60Hz 1~		
Refrigerant	R134a		
Application	HBP		
Voltage range	198-254V		
Starting torque	HST		
Approvals	VDE		
	UL		
	CCC		
	KC		

Ambient temperatures / system cooling	
Ambient temperature min.:	10°C / 50°F
Ambient temperature max.:	43°C / 110°F

System cooling (n/a: outside limits)			
T ambient	LBP	MBP	HBP
32°C / 90°F	n/a	n/a	fan 3m/s
38°C / 100°F	n/a	n/a	fan 3m/s
43°C / 110°F	n/a	n/a	fan 3m/s

Operation pressure range

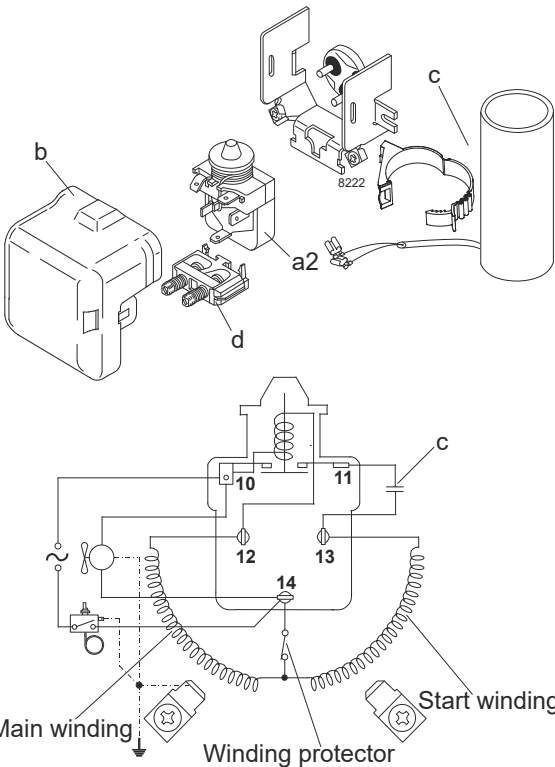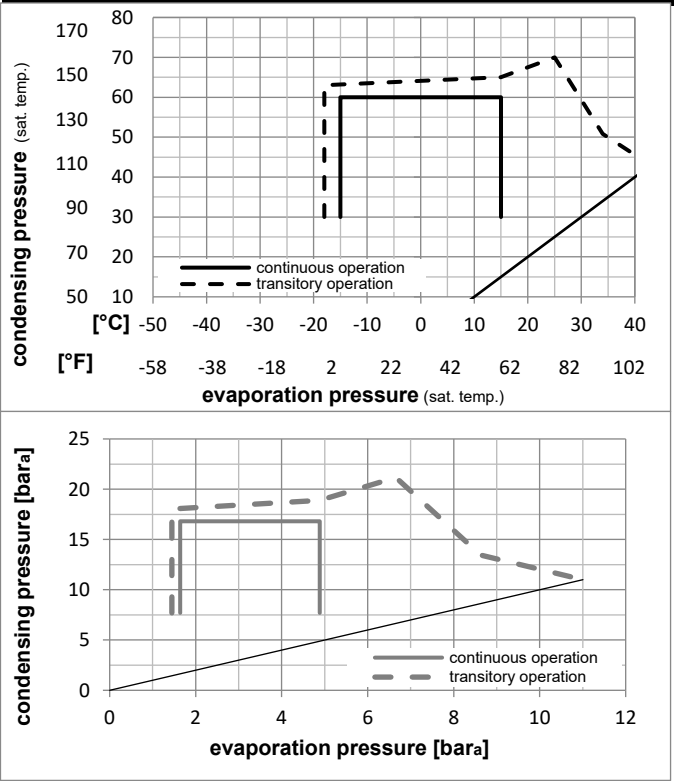

Components		
a2	relay	117U6005
c	start capacitor (80μF)	117U5017
d	cord relief	103N1004
b	plastic cover	103N2008

Model

Designation

SC10GH

208-230V/60Hz

Conf. 3

Sales code:

104G8041



Optimization + standard conditions

R134a, 230V/60Hz, CSIR, fan 3m/s, VDE, UL, CCC, KC

Evaporating pressure (saturation temperature)					Condensing pressure (saturation temperature)						Power consumption			
											Current consumption			
											Ref. mass flow			

Model				
Designation	SC10GH	208-230V/60Hz	Conf. 4	Sales code: 104G8041


Configuration		Electrical accessories / wiring diagram	
Motorconfiguration	CSIR	CSIR	
Power supply (nominal)	208-230V/60Hz 1~		
Refrigerant	R513A		
Application	HBP		
Voltage range	198-254V		
Starting torque	HST		
Approvals	VDE		
	UL		
	CCC		

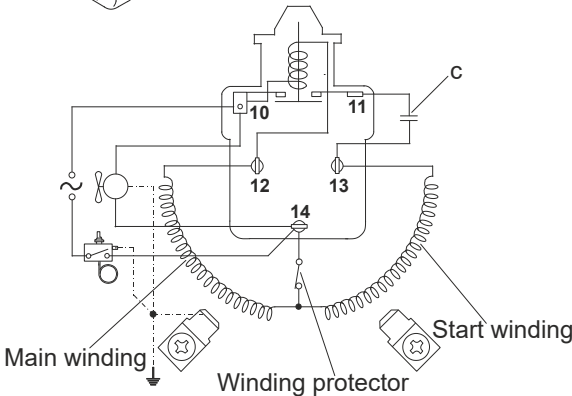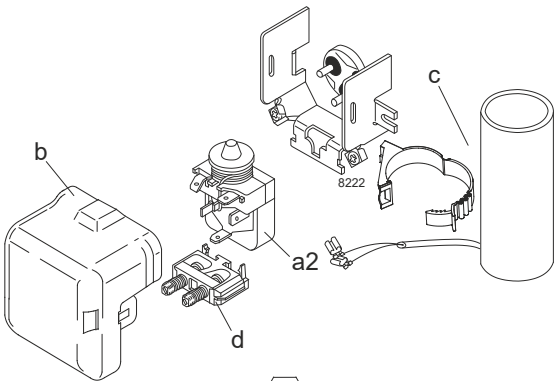

Ambient temperatures / system cooling	
Ambient temperature min.:	10°C / 50°F
Ambient temperature max.:	43°C / 110°F

System cooling (n/a: outside limits)			
T ambient	LBP	MBP	HBP
32°C / 90°F	n/a	n/a	fan 3m/s
38°C / 100°F	n/a	n/a	fan 3m/s
43°C / 110°F	n/a	n/a	fan 3m/s

Operation pressure range

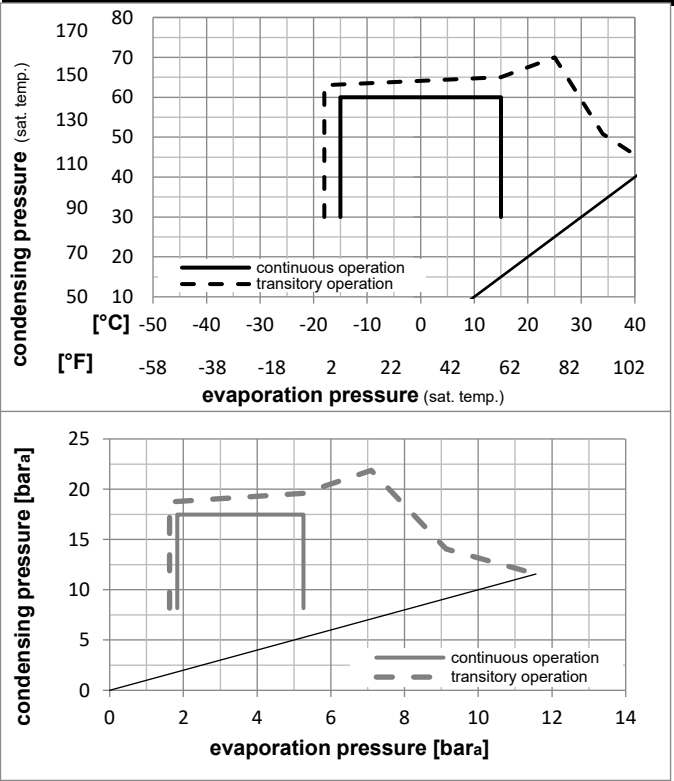

Components		
a2	relay	117U6005
c	start capacitor (80μF)	117U5017
d	cord relief	103N1004
b	plastic cover	103N2008

Model

Designation

SC10GH

208-230V/60Hz

Conf. 4

Sales code:

104G8041

Optimization + standard conditions

R513A, 230V/60Hz, CSIR, fan 3m/s, VDE, UL, CCC

		Evaporating pressure (saturation temperature)				Condensing pressure (saturation temperature)			Return gas temp.			Liquid temp.			Cooling capacity			COP			EER			Power consumption			Ref. mass flow	
		pe	pc	RGT	Tliq	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]	[W]	[A]	[kg/h]	P1	I	m	[W]	[A]	[kg/h]	[W]	[A]	[kg/h]	[W]	[A]	[kg/h]		
[°C]	[°F]	7,2	54	35	46	1068,1	3648	919,2	1,99	6,79	1,71	537,1	3,39	26,53	ASHRAE HBP													
[°C]	[°F]	45	130	95	115																							
[°C]	[°F]	5	55	32	55	860,9	2940	740,9	1,66	5,67	1,43	518,7	3,29	24,19	cecomaf HBP													
[°C]	[°F]	41	131	90	131																							
[°C]	[°F]	5	50	20	50	921,4	3147	793,0	1,88	6,42	1,62	490,1	3,13	26,42	EN12900 HBP													
[°C]	[°F]	41	122	68	122																							
[°C]	[°F]	-7	54	35	46	584,9	1997	503,3	1,47	5,03	1,27	396,7	2,62	14,33	ASHRAE MBP													
[°C]	[°F]	20	130	95	115																							
[°C]	[°F]	-10	55	32	55	437,3	1494	376,4	1,21	4,13	1,04	361,5	2,42	12,09	cecomaf MBP													
[°C]	[°F]	14	131	90	131																							
[°C]	[°F]	-10	45	20	45	539,8	1843	464,5	1,51	5,15	1,30	357,8	2,40	14,31	EN12900 MBP													
[°C]	[°F]	14	113	68	113																							

Performance tables

R513A, 230V/60Hz, CSIR, fan 3m/s, VDE, UL, CCC

	pe		Cooling capacity			COP		EER		P1		I		m	
	[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]	[W]	[A]	[kg/h]	[W]	[A]	[kg/h]	[kg/h]
[°C / °F]	-15	5	448,6	1532	386,0	1,40	4,77	1,20	321,0	2,20	10,99				
cond. pressure	-10	14	564,5	1928	485,8	1,58	5,39	1,36	357,8	2,40	13,88				
pc= 45/113	-5	23	705,0	2408	606,7	1,79	6,11	1,54	394,0	2,60	17,40				
return gas temp.	0	32	872,9	2981	751,2	2,03	6,95	1,75	429,1	2,79	21,65				
RGT= 32/90	5	41	1070,6	3656	921,4	2,31	7,90	1,99	462,8	2,98	26,70				
liquid temp	10	50	1301,0	4443	1119,7	2,63	8,99	2,26	494,5	3,15	32,66				
Tliq= 45/113	15	59	1566,6	5350	1348,2	2,99	10,21	2,57	523,8	3,31	39,64				
[°C / °F]	-15	5	335,2	1145	288,4	1,09	3,72	0,94	307,5	2,13	9,23				
cond. pressure	-10	14	437,3	1494	376,4	1,21	4,13	1,04	361,5	2,42	12,09				
pc= 55/131	-5	23	557,3	1903	479,6	1,34	4,59	1,16	415,0	2,72	15,48				
return gas temp	0	32	697,6	2382	600,3	1,49	5,10	1,28	467,5	3,01	19,48				
RGT= 32/90	5	41	860,9	2940	740,9	1,66	5,67	1,43	518,7	3,29	24,19				
liquid temp	10	50	1049,9	3586	903,6	1,85	6,31	1,59	568,1	3,56	29,73				
Tliq= 55/131	15	59	1267,3	4328	1090,6	2,06	7,03	1,77	615,2	3,82	36,19				