

EMT2117U



**ENGINEERING CODE**  
872CA62



**REFRIGERANT**  
R-290



**POWER SUPPLY**  
220-240 V 50 Hz



**APPLICATION**  
LBP



**MOTOR TYPE**  
CSIR



**STANDARD**  
EN12900



**COOLING CAPACITY**  
121 W



**EFFICIENCY**  
1.1 W/W

DATA

GENERAL DATA

Model	EMT2117U
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	LBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Static/220
HP	1/5
Starting Torque	HST
Plant	ITALY

ELECTRICAL DATA

Start Winding Resistance	null
Run Winding Resistance	null
Locked Rotor Amperage (LRA) 50Hz	7.7 A

## MECHANICAL DATA

Displacement	4.5 cm <sup>3</sup>
Oil Charge	180 ml
Oil Type	ESTER
Oil Viscosity	ISO22
Weight	7.8 Kg

## ELECTRICAL COMPONENTS

Start Capacitor	43-53 µf/330 V
CSR CSIR BOX	No
Starting Device Type	RELAY
Starting Device Description	MTRP-0015*
Overload Protection	T0231/G6

## PERFORMANCE

### TESTED CONDITIONS

Tested Refrigerant	R-290
Tested Application	LBP
Tested Standard	EN12900
Tested Cooling	Static
Tested Voltage	220 V
Max Refrigerant Charge	150 g
Refrigerant Temperature	Dew

### RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
40	-35	121	1.1	110	-	1.39

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

**PERFORMANCE CURVE**
**Condensing Temperature 35°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-40	102	1.05	97	-	1.11
-35	132	1.23	107	-	1.45
-30	168	1.43	118	-	1.85
-25	211	1.65	128	-	2.33
-20	261	1.90	137	-	2.89
-15	319	2.19	145	-	3.55
-10	386	2.55	152	-	4.32

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

**PERFORMANCE CURVE**
**Condensing Temperature 45°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-40	83	0.83	100	-	0.99
-35	110	0.99	112	-	1.33
-30	143	1.14	125	-	1.72
-25	181	1.31	138	-	2.19
-20	226	1.50	150	-	2.75
-15	278	1.71	162	-	3.40
-10	338	1.96	173	-	4.16

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

**PERFORMANCE CURVE**
**Condensing Temperature 55°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-30	116	0.91	128	-	1.56
-25	150	1.05	143	-	2.03
-20	190	1.19	159	-	2.57
-15	236	1.35	175	-	3.22
-10	289	1.53	189	-	3.97

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

## ENVELOPE



## External

### EXTERNAL CHARACTERISTICS


Base Plate SMALL

Tray Holder NO

Connector	Internal Diameter	Shape	Material
Suction	6.1 mm	SLANTED 42°	COPPER
Discharge	4.94 mm	STRAIGHT	COPPER
Process	6.1 mm	SLANTED 42°	COPPER

### EXTERNAL DIMENSIONS

#### SHELL

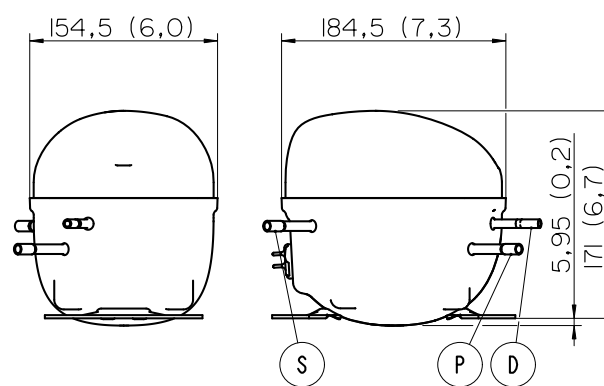

#### BASE



#### FENCE

