


EMT6170Z

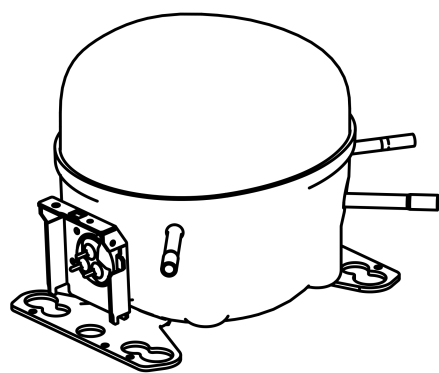

ENGINEERING CODE
194VA67

REFRIGERANT
R-134a

POWER SUPPLY
220-240 V 50 Hz

APPLICATION
HBP

MOTOR TYPE
CSIR

STANDARD
EN12900

COOLING CAPACITY
697 W

EFFICIENCY
2.06 W/W

DATA

GENERAL DATA

Model	EMT6170Z
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	HBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/220
HP	1
Starting Torque	HST
Plant	ITALY

ELECTRICAL DATA

Start Winding Resistance	20.66 Ω at 25°C
Run Winding Resistance	10.77 Ω at 25°C

MECHANICAL DATA

Displacement	7.69 cm ³
Oil Charge	180 ml
Oil Type	ESTER
Oil Viscosity	ISO22
Weight	7.8 Kg

ELECTRICAL COMPONENTS

Start Capacitor	43-53 µf/330 V
CSR CSIR BOX	No
Starting Device Type	RELAY
Starting Device Description	MTRP-38*
Overload Protection	T0976/G6

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-134a
Tested Application	HBP
Tested Standard	EN12900
Tested Cooling	Fan
Tested Voltage	220 V
Max Refrigerant Charge	250 g
Refrigerant Temperature	Dew

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
50	5	697	2.06	339	-	17.5

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

PERFORMANCE CURVE

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-15	371	1.88	198	-	7.86
-10	466	2.13	219	-	9.92
-5	578	2.36	245	-	12.35
0	706	2.61	270	-	15.17
5	850	2.89	294	-	18.42
10	1012	3.22	314	-	22.13

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

PERFORMANCE CURVE

Condensing Temperature 45°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-15	322	1.51	213	-	7.47
-10	407	1.74	234	-	9.50
-5	507	1.93	263	-	11.89
0	621	2.10	295	-	14.66
5	749	2.27	330	-	17.84
10	893	2.45	364	-	21.47

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

PERFORMANCE CURVE

Condensing Temperature 55°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-10	344	1.41	243	-	8.91
-5	431	1.61	269	-	11.26
0	532	1.76	303	-	13.98
5	644	1.88	343	-	17.10
10	770	1.99	386	-	20.65

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

ENVELOPE




External

EXTERNAL CHARACTERISTICS


Base Plate		SMALL	
Tray Holder		YES	
Connector	Internal Diameter	Shape	Material
Suction	6.1 mm	SLANTED 42°	COPPER
Discharge	4.94 mm	STRAIGHT	COPPER
Process	6.1 mm	SLANTED 42°	COPPER

EXTERNAL DIMENSIONS

SHELL

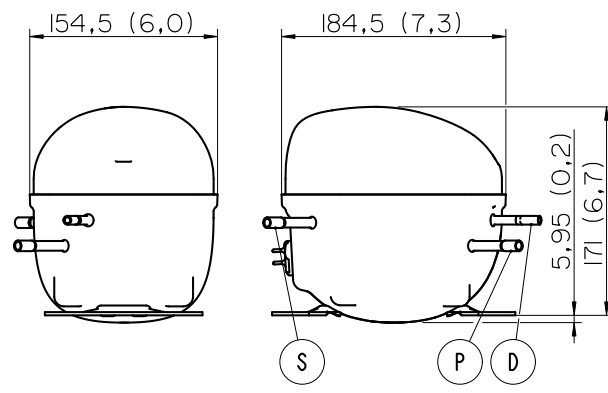

BASE

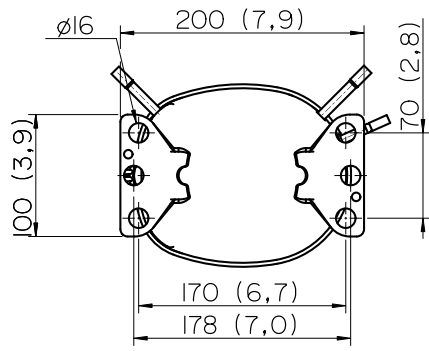

FENCE

