


NEK1150U



 **ENGINEERING CODE**
863BA51

 **REFRIGERANT**
R-290


 **POWER SUPPLY**
220-240 V 50 Hz

 **APPLICATION**
LBP

 **MOTOR TYPE**
RSIR

 **STANDARD**
EN12900

 **COOLING CAPACITY**
327 W

 **EFFICIENCY**
0.98 W/W



DATA

GENERAL DATA

Model	NEK1150U
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	LBP
Expansion Device	Capillary Tube
Compressor Cooling	Fan/220
HP	1/2
Starting Torque	LST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	16.14 Ω at 25°C
Run Winding Resistance	4.26 Ω at 25°C

MECHANICAL DATA

Displacement	13.54 cm ³
Oil Charge	350 ml
Oil Type	AB
Oil Viscosity	ISO32
Weight	11.6 Kg

ELECTRICAL COMPONENTS

CSR CSIR BOX	No
Starting Device Type	RELAY
Starting Device Description	MTRP-0050*
Overload Protection	T0887/G9

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-290
Tested Application	LBP
Tested Standard	EN12900
Tested Cooling	Fan
Tested Voltage	220 V
Refrigerant Temperature	Dew

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
40	-35	327	0.98	335	-	3.75

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

PERFORMANCE CURVE

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-40	270	0.93	291	-	2.95
-35	353	1.08	327	-	3.87
-30	454	1.24	365	-	5.00
-25	575	1.42	404	-	6.35
-20	714	1.62	442	-	7.92
-15	873	1.83	476	-	9.72
-10	1050	2.08	504	-	11.75

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

PERFORMANCE CURVE

Condensing Temperature 45°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-40	231	0.76	303	-	2.78
-35	302	0.88	341	-	3.63
-30	390	1.01	385	-	4.70
-25	495	1.15	432	-	6.00
-20	618	1.29	480	-	7.52
-15	757	1.44	527	-	9.27
-10	915	1.60	571	-	11.26

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.


PERFORMANCE CURVE

Condensing Temperature 55°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-30	326	0.83	394	-	4.38
-25	415	0.93	447	-	5.61
-20	520	1.03	503	-	7.06
-15	641	1.14	561	-	8.75
-10	778	1.26	618	-	10.68

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

ENVELOPE

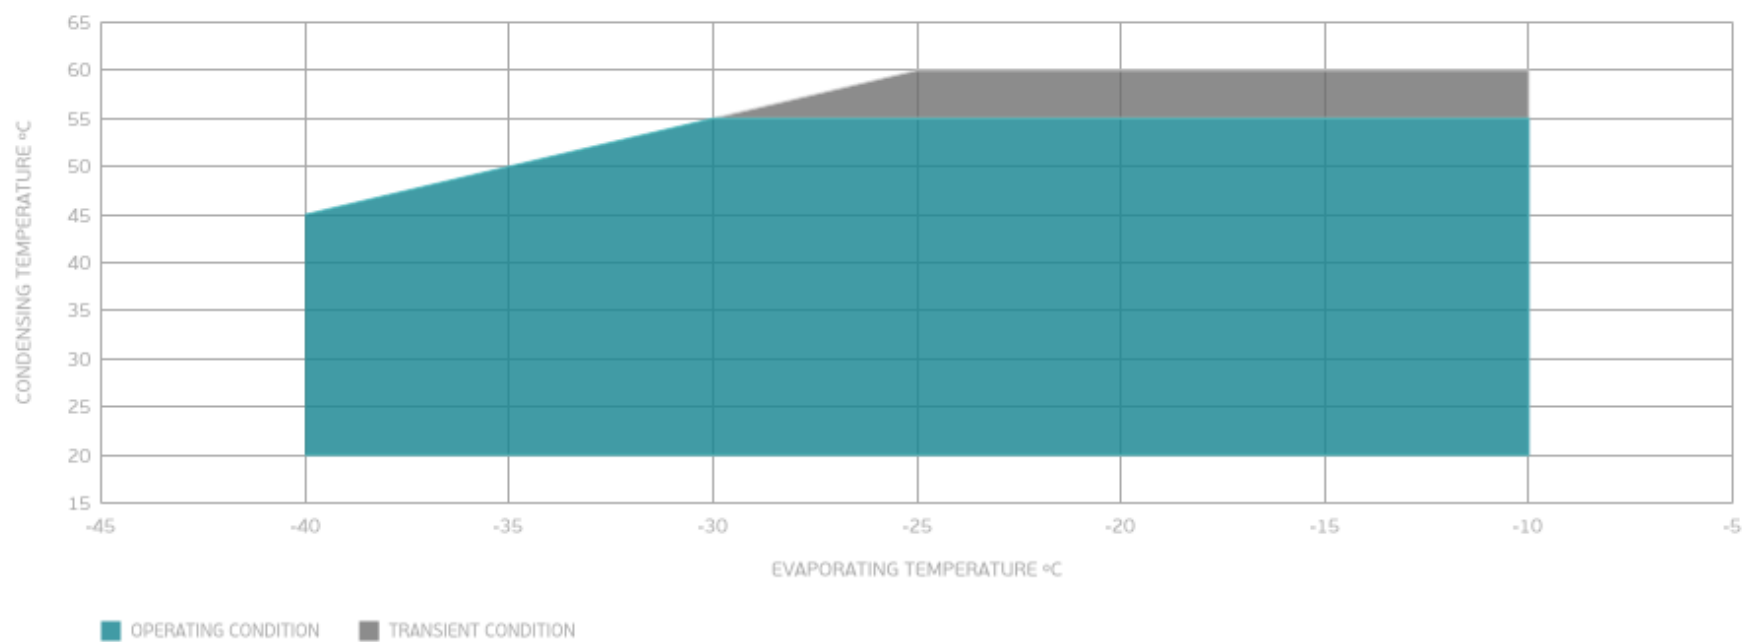

External

EXTERNAL CHARACTERISTICS

Base Plate		SMALL	
Tray Holder		NO	
Connector	Internal Diameter	Shape	Material
Suction	8.1 mm	SLANTED 42°	COPPER
Discharge	6.1 mm	STRAIGHT	COPPER

EXTERNAL DIMENSIONS

SHELL



BASE



FENCE

