


EMX32CLC



**ENGINEERING CODE**  
700GA89

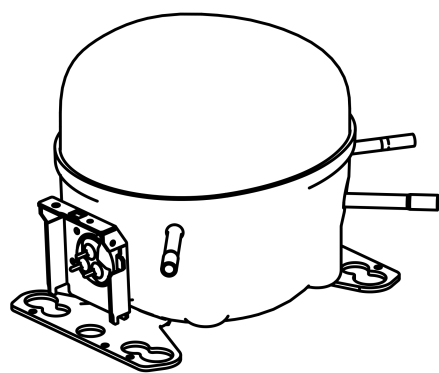

**REFRIGERANT**  
R-600a



**POWER SUPPLY**  
220-240 V 50 Hz



**APPLICATION**  
LBP



**MOTOR TYPE**  
RSCR



**STANDARD**  
EN12900



**COOLING CAPACITY**  
52 W



**EFFICIENCY**  
1.45 W/W



DATA

GENERAL DATA

Model	EMX32CLC
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	LBP
Expansion Device	Capillary Tube
Compressor Cooling	Static/220
Starting Torque	LST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	23.9 Ω at 25°C
Run Winding Resistance	42.5 Ω at 25°C
Locked Rotor Amperage (LRA) 50Hz	3.3 A
Rated Load Amperage (LMBP) at 50 Hz	0.6 A
Rated Load Amperage (HBP) at 50 Hz	0.7 A

## MECHANICAL DATA

Displacement	5.96 cm <sup>3</sup>
Oil Charge	150 ml
Oil Type	ALQUILB
Oil Viscosity	ISO5
Weight	7.3 Kg

## ELECTRICAL COMPONENTS

Run Capacitor	2.5 µf/300 V
CSR CSIR BOX	No
Starting Device Type	PTC
Starting Device Description	MI2021X V230
Overload Protection	AX24BNXX T0223/07

## PERFORMANCE

### TESTED CONDITIONS

Tested Refrigerant	R-600a
Tested Application	LBP
Tested Standard	EN12900
Tested Cooling	Static
Tested Voltage	220 V
Max Refrigerant Charge	150 g
Refrigerant Temperature	Dew

### RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
40	-35	52	1.45	36	-	0.63

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

### PERFORMANCE CURVE

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-35	60	1.67	36	-	0.70
-30	81	1.90	42	-	0.94
-25	104	2.12	49	-	1.22
-20	131	2.36	56	-	1.54
-15	163	2.66	61	-	1.91
-10	199	3.02	66	-	2.34

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

## PERFORMANCE CURVE

Condensing Temperature 45°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-35	45	1.25	36	-	0.57
-30	63	1.46	43	-	0.81
-25	85	1.65	51	-	1.08
-20	110	1.85	59	-	1.40
-15	139	2.07	67	-	1.78
-10	173	2.33	74	-	2.23

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

## PERFORMANCE CURVE

Condensing Temperature 55°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-30	48	1.12	42	-	0.67
-25	67	1.29	52	-	0.94
-20	89	1.46	61	-	1.26
-15	116	1.64	71	-	1.64
-10	147	1.85	80	-	2.09

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.


## PERFORMANCE CURVE

Condensing Temperature 65°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-25	51	1.01	50	-	0.80
-20	70	1.16	61	-	1.11
-15	94	1.31	72	-	1.49
-10	122	1.48	83	-	1.94

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

## ENVELOPE

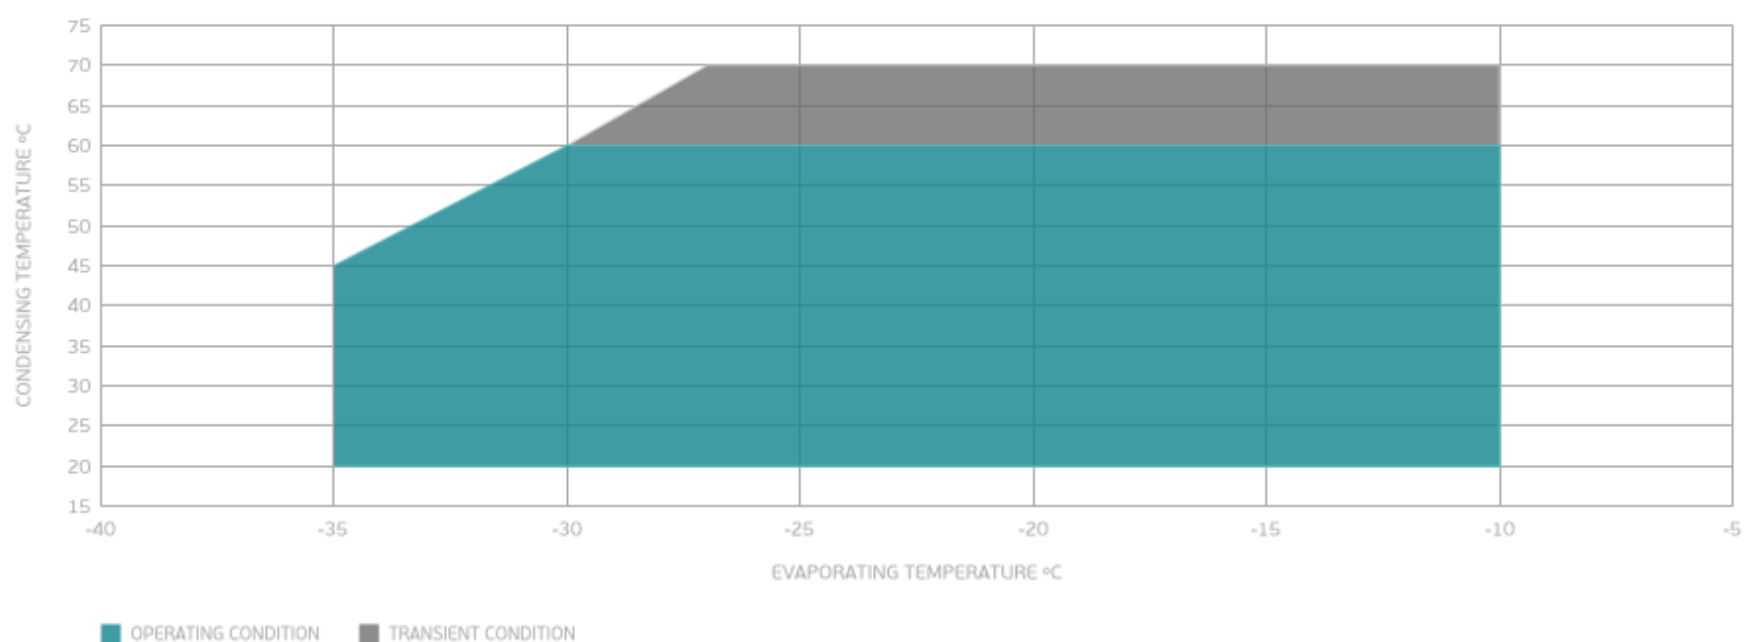

External

## EXTERNAL CHARACTERISTICS


<b>Base Plate</b>		SMALL
<b>Tray Holder</b>		NO


Connector	Internal Diameter	Shape	Material
<b>Suction</b>	6.1 mm	SLANTED 42° UP + 45° TO BACK	COPPER
<b>Discharge</b>	5.1 mm	SLANTED 42° UP + 45° TO BACK	COPPER
<b>Process</b>	6 mm	SLANTED 43° UP + 45° TO BACK	COPPER(OD)

## EXTERNAL DIMENSIONS

### SHELL

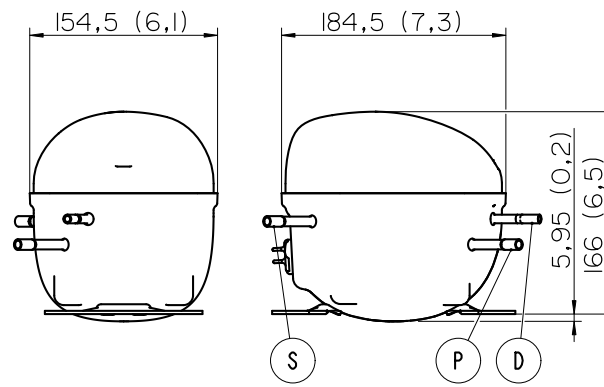

### BASE

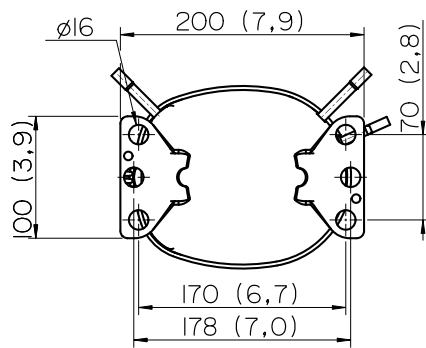

### FENCE

