


NT6215ZV

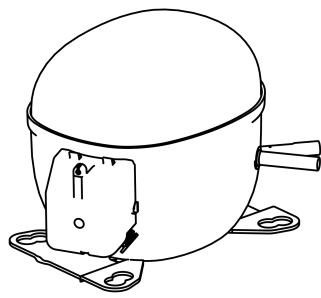

ENGINEERING CODE
212FN04

REFRIGERANT
R-134a

POWER SUPPLY
200-240 V 50
Hz/230 V 60 Hz

APPLICATION
HBP

MOTOR TYPE
CSIR

STANDARD
EN12900



COOLING CAPACITY
1414 W

EFFICIENCY
2.35 W/W

DATA

GENERAL DATA

Model	NT6215ZV
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	HBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/200
HP	1/2+
Starting Torque	HST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	13.8 Ω at 25°C
Run Winding Resistance	2.7 Ω at 25°C

MECHANICAL DATA

Displacement	17.39 cm ³
Oil Charge	450 ml
Oil Type	ESTER
Oil Viscosity	ISO22
Weight	17 Kg

ELECTRICAL COMPONENTS

Start Capacitor	64-77 µf/330 V
CSR CSIR BOX	No
Starting Device Type	RELAY
Starting Device Description	MTRP-46*
Overload Protection	T0540/G8

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-134a
Tested Application	HBP
Tested Standard	EN12900
Tested Cooling	Fan
Tested Voltage	200 V
Max Refrigerant Charge	800 g
Refrigerant Temperature	Dew

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
50	5	1414	2.35	602	3.73	35.47

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

PERFORMANCE CURVE

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-15	732	2.08	353	2.77	15.50
-10	928	2.37	391	2.91	19.73
-5	1168	2.72	429	3.04	24.96
0	1456	3.16	461	3.17	31.31
5	1795	3.72	483	3.29	38.89
10	2188	4.47	489	3.42	47.85

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

PERFORMANCE CURVE

Condensing Temperature 45°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-15	628	1.64	383	2.85	14.57
-10	793	1.87	424	3.03	18.50
-5	999	2.11	473	3.21	23.43
0	1248	2.38	524	3.39	29.46
5	1542	2.70	571	3.58	36.73
10	1886	3.09	610	3.78	45.34

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

PERFORMANCE CURVE

Condensing Temperature 55°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-10	657	1.46	448	3.17	17.03
-5	827	1.66	500	3.39	21.58
0	1035	1.85	560	3.63	27.23
5	1285	2.06	624	3.89	34.10
10	1578	2.29	688	4.17	42.32

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

ENVELOPE




External

EXTERNAL CHARACTERISTICS


Base Plate		UNI	
Tray Holder		NO	
Connector	Internal Diameter	Shape	Material
Suction	9.6 mm	VERTICAL	COPPER
Discharge	6.42 mm	VERTICAL	COPPER
Process	6.42 mm	VERTICAL	COPPER

EXTERNAL DIMENSIONS

SHELL

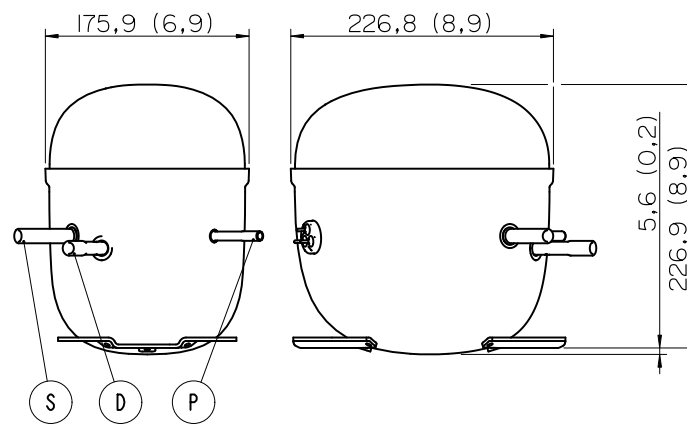

BASE

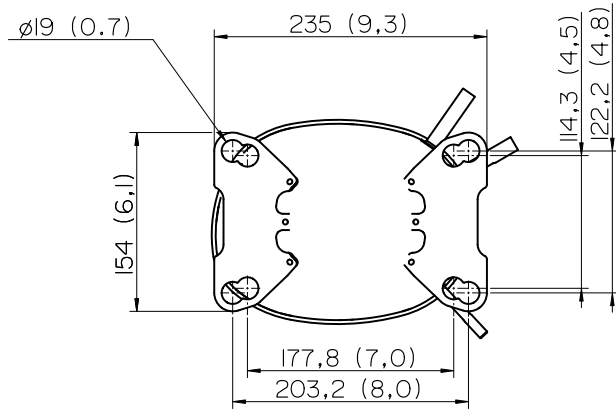

FENCE

